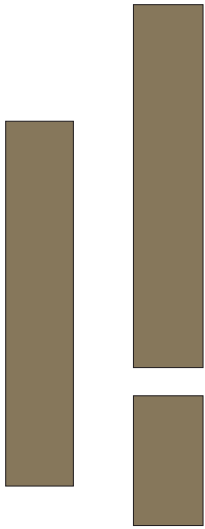



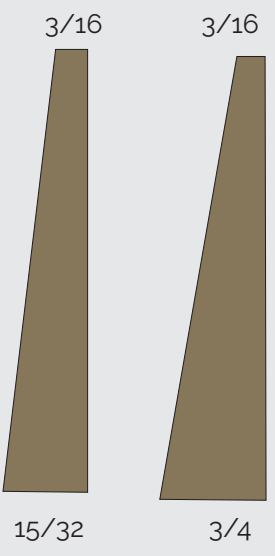


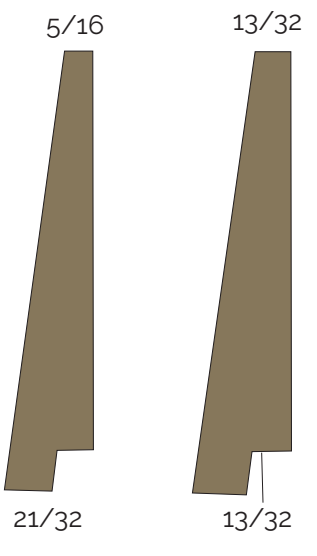









Siding Patterns	Nominal Sizes* Thickness & Width	Nailing				
		6" and Narrower	8" and Wider			
	<p>TRIM BOARD-ON-BOARD BOARD-AND-BATTEN Boards are surfaced smooth, rough or sawtextured. Rustic ranchstyle appearance. Provide horizontal nailing members. Do not nail through overlapping pieces. Vertical applications only.</p>	<p>1 x 2 1 x 4 1 x 6 1 x 8 1 x 10 1 x 12 1 1/4 x 6 1 1/4 x 8 1 1/4 x 10 1 1/4 x 12</p>	<p>Board and Batten</p> 	<p>Board and Batten</p> 	<p>Board on Board</p> 	
<p>Recommend 1/2" overlap. One siding or box nail per bearing.</p>	<p>Increase overlap proportionately. Use two siding or box nails, 3-4" apart.</p>					
	<p>BEVEL or BUNGALOW Bungalow ("Colonial") is slightly thicker than Bevel. Either can be used with the smooth or sawfaced surface exposed. Patterns provide a traditional-style appearance. Recommend a 1" overlap. Do not nail through overlapping pieces. Horizontal applications only. Cedar Bevel is also available in 7/8 x 10, 12.</p>	<p>1/2 x 2 1/2 x 4 1/2 x 5 1/2 x 6 1/2 x 8 1/2 x 10 3/4 x 6 3/4 x 8 3/4 x 10</p>	<p>Plain</p> 	<p>Plain</p> 		
<p>Recommend 1" overlap. One siding or box nail per bearing, just above the 1" overlap.</p>						
	<p>DOLLY VARDEN Dolly Varden is thicker than Bevel and has a rabbeted edge. Surfaced smooth or saw-textured. Provides a traditionalstyle appearance. Allows for a 1/2" overlap, including an approximate 1/8" gap. Do not nail through overlapping pieces. Horizontal applications only. Cedar Dolly Varden is also available in 7/8 x 10, 12.</p>	<p>Standard Dolly Varden 3/4 x 6 3/4 x 8 3/4 x 10</p> <p>Thick Dolly Varden 1 x 6 1 x 8 1 x 10 1 x 12</p>	<p>Rabbeted Edge</p> 	<p>Rabbeted Edge</p> 	<p>approximate 1/8" gap for dry material 8" and wider</p> <p>1/2" = full depth of rabbet</p>	
<p>Allows for 1/2" overlap. One siding or box nail per bearing, 1" up from bottom edge.</p>						
	<p>DROP Drop siding is available in 13 patterns, in smooth, rough or saw-textured surfaces. Some are T&G, others shiplapped. Refer to Standard Patterns (G-16) for dimensional pattern profiles. A variety of looks can be achieved with the different patterns. Do not nail through overlapping pieces. Horizontal or vertical applications. Tongued edge up in horizontal applications.</p>	<p>3/4 x 6 3/4 x 8 3/4 x 10</p>	<p>T&G Patterns</p> 	<p>Shiplap Patterns</p> 	<p>T&G Patterns</p> 	<p>Shiplap Patterns</p> 
<p>Use casing nails to blind nail T&G patterns, one nail per bearing. Use siding or box nails to face nail shiplap patterns, 1" up from bottom edge.</p>	<p>Use two siding or box nails, 3-4" apart to face nail, 1" up from bottom edge.</p>				<p>approximate 1/8" gap for dry material 8" and wider</p> <p>1/2" = full depth of rabbet</p>	

*Note: Refer to WWPA's Standard Patterns (G-16) for scale profiles and actual dimensions of run-to-pattern products.